


Aerodrome Chart - **EKBI**

Billund

RWY	Direction	THR PSN	PSN TWY	TORA	TODA	ASDA	LDA	Strength
09	086.8° GEO 082° MAG	55 44 23.26N 009 08 05.35E	D A B F C	3101 2887 2350 2323 2033	3101 2887 2350 2323 2033	3101 2887 2350 2323 2033	2951	PCN 110 / F / A / X / T
27	266.8° GEO 262° MAG	55 44 28.22N 009 10 45.66E	K M Y C B	2951 O / R 3101 2172 1551 1048 693	2951 O / R 3101 2172 1551 1048 693	3101 2322 1701 1198 843	2951	
RWY day marking : THR, RWY NR, Aiming point, TDZ, Centre line, Side stripes. RWY lighting : PAPI, ALS, THR, TDZ, Centre line, Edge, End. Secondary power supply : Switch-over time MAX 15 SEC. All OBST are marked by day and night. TAXIWAYS: Width : TWY A, B, C, D, F, J, K, M, N and S : 23 M TWY H : 57 M Pavement : TWY A, B, C, D, F, J, K, M, N and S : Asphalt TWY H : Grass Strength : TWY A, B and C : PCN 110 / F / A / X / T TWY J, K and S : PCN 90 / F / C / W / T TWY D, F and N : PCN 70 / F / C / W / T TWY M : PCN 65 / F / A / W / T Day marking : Centre line, holding positions at all TWY/RWY intersections marked. Side stripes where deemed necessary. Lighting : Centre line, Stop bars and RGL: TWY A, B, C, D, F, H, J, K, M, N and S Remarks : From TWY B to TWY C eastbound : No centerline light From TWY M to TWY K eastbound : Day marking only for aircraft ICAO code letter C SECONDARY TAXIWAYS G and G2 : Width : 12 M Pavement : Asphalt Lighting : Blue edge LIL on TWY G RWY slope : Less than 0.4 %. Remarks : TWY G and G2 to be used by aircraft ICAO letter A and B only.								


Ref. AIP GEN 2.3 : Special legend for aerodromes with apron boundaries

ELEV in FT
Dimensions in M

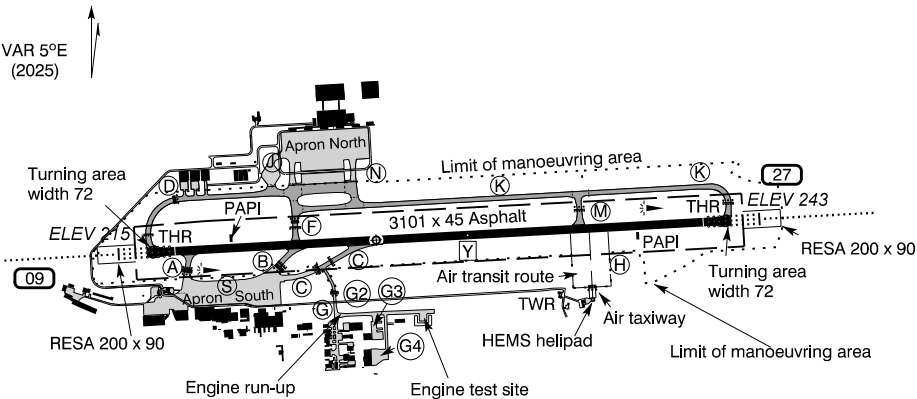

Datum : WGS-84

SCALE 1 : 40 000



Changes : Orange ATC service boundary marking withdrawn from chart.