
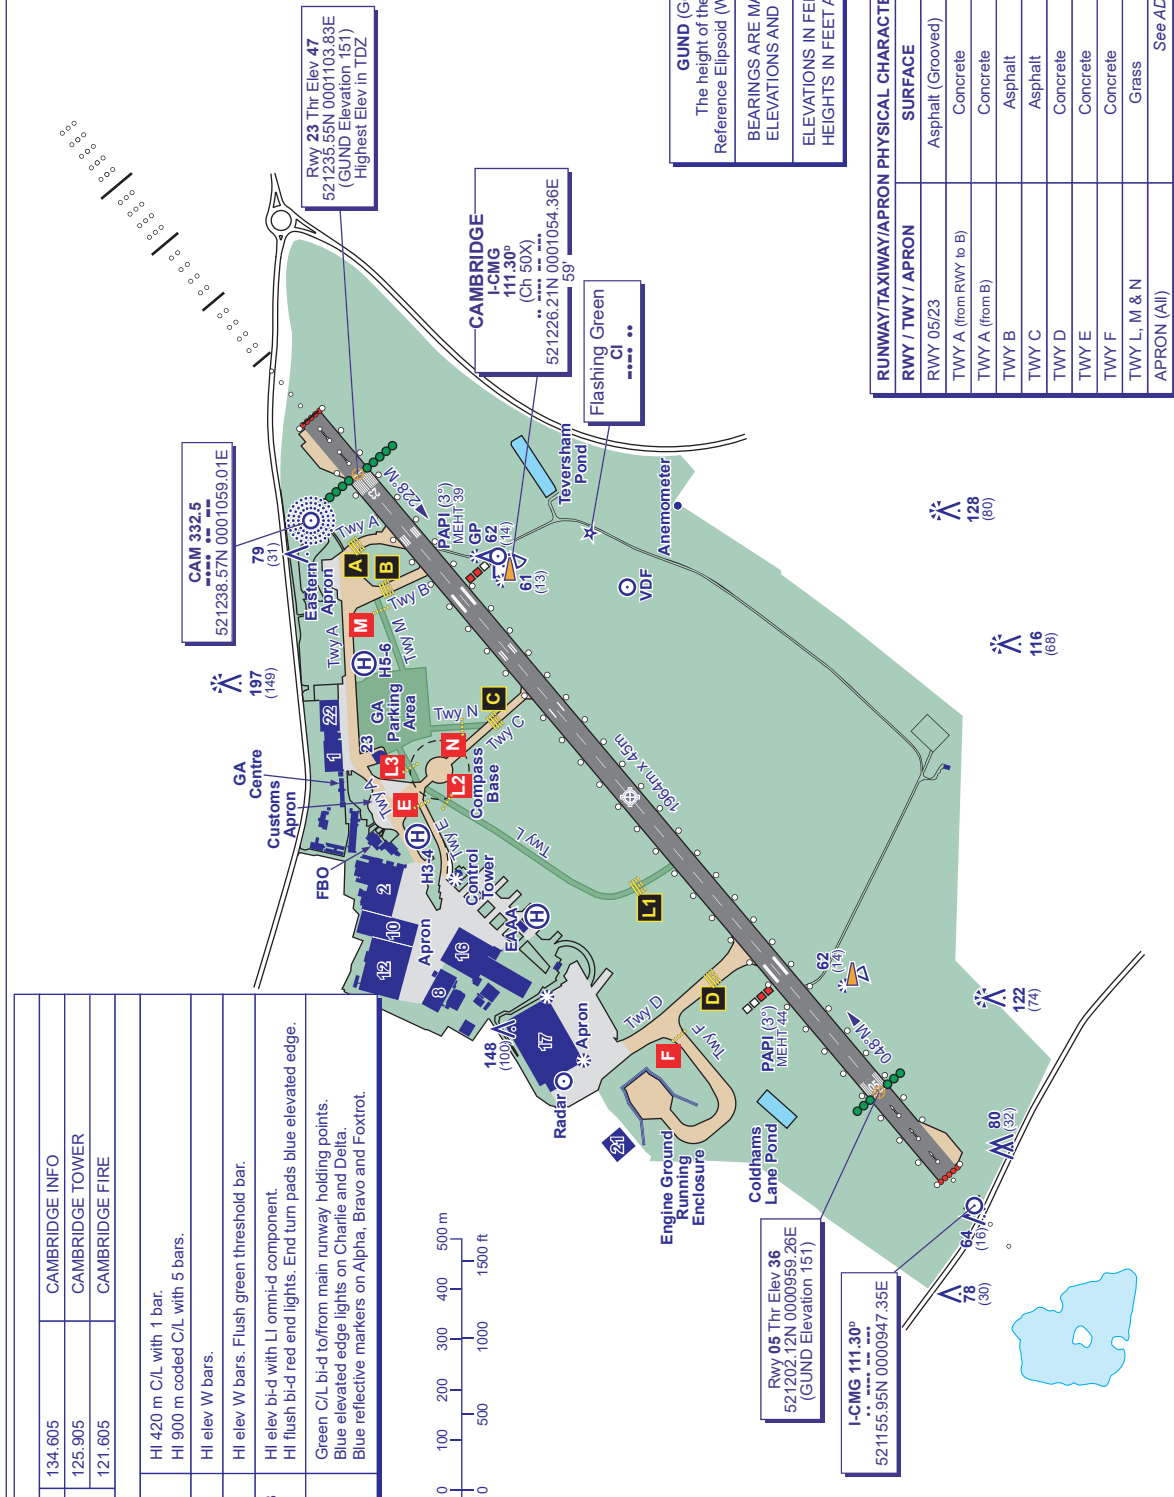


COM	134.605	CAMBRIDGE INFO
ATIS	125.905	CAMBRIDGE TOWER
TWR	121.605	CAMBRIDGE FIRE
LIGHTING		
APCH 05	HI 420 m C/L with 1 bar.	
APCH 23	HI 900 m coded C/L with 5 bars.	
THR 05	HI elev W bars.	
THR 23	HI elev W bars. Flush green threshold bar.	
RWY 05/23	HI elev bi-d with LI omni-d component.	
TWY	Green C/L bi-d to/from main runway holding points. Blue elevated edge lights on Charlie and Delta. Blue reflective markers on Alpha, Bravo and Foxtrot.	



GUND (Geoid Undulation) = The height of the Geoid (MSL) above the Reference Ellipsoid (WGS 84) at the stated position.	
BEARINGS ARE MAGNETIC ELEVATIONS AND HEIGHTS ARE IN FEET	
ELEVATIONS IN FEET AMSL	178
HEIGHTS IN FEET ABOVE AD	(131)

RUNWAY/TAXIWAY/APRON PHYSICAL CHARACTERISTICS		
RWY / TAXIWAY / APRON	SURFACE	PCN
RWY 05/23	Asphalt (Grooved)	50/F/C/W/T
TWY A (from RWY to B)	Concrete	42/R/C/X/T
TWY A (from B)	Concrete	14/R/C/X/T
TWY B	Asphalt	15/R/C/X/T
TWY C	Asphalt	24/F/C/X/U
TWY D	Concrete	50/R/C/W/T
TWY E	Concrete	11/R/C/W/T
TWY F	Concrete	39/R/C/X/T
TWY L, M & N	Grass	-
APRON (All)	See AD 2-EGSC 2-2	